

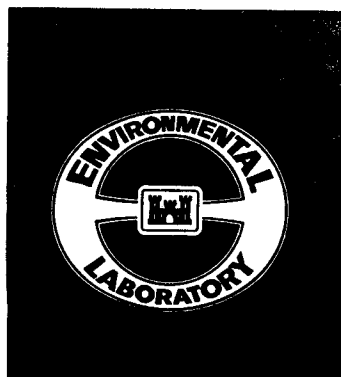




US Army Corps  
of Engineers



## ENVIRONMENTAL IMPACT RESEARCH PROGRAM

TECHNICAL REPORT EL-86-44

# POWER GRUBBERS

## Section 8.2.3, US ARMY CORPS OF ENGINEERS WILDLIFE RESOURCES MANAGEMENT MANUAL

by

Ted B. Doerr

Environmental Laboratory

DEPARTMENT OF THE ARMY  
Waterways Experiment Station, Corps of Engineers  
PO Box 631, Vicksburg, Mississippi 39180-0631



July 1986

Final Report

Approved For Public Release; Distribution Unlimited

Prepared for DEPARTMENT OF THE ARMY  
US Army Corps of Engineers  
Washington, DC 20314-1000  
Under EIRP Work Unit 31631

Destroy this report when no longer needed. Do not return  
it to the originator.

The findings in this report are not to be construed as an official  
Department of the Army position unless so designated  
by other authorized documents.

The contents of this report are not to be used for  
advertising, publication, or promotional purposes.  
Citation of trade names does not constitute an  
official endorsement or approval of the use of  
such commercial products.

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE				Form Approved OMB No 0704-0188 Exp Date Jun 30, 1986	
1a. REPORT SECURITY CLASSIFICATION <b>Unclassified</b>			1b. RESTRICTIVE MARKINGS		
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION/AVAILABILITY OF REPORT		
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE			Approved for public release; distribution unlimited.		
4. PERFORMING ORGANIZATION REPORT NUMBER(S)  Technical Report EL-86-44			5. MONITORING ORGANIZATION REPORT NUMBER(S)		
6a. NAME OF PERFORMING ORGANIZATION USAEWES Environmental Laboratory		6b. OFFICE SYMBOL (If applicable)	7a. NAME OF MONITORING ORGANIZATION		
6c. ADDRESS (City, State, and ZIP Code)  PO Box 631 Vicksburg MS 39180-0631			7b. ADDRESS (City, State, and ZIP Code)		
8a. NAME OF FUNDING/SPONSORING ORGANIZATION US Army Corps of Engineers		8b. OFFICE SYMBOL (If applicable)	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER		
8c. ADDRESS (City, State, and ZIP Code)  Washington, DC 20314-1000			10. SOURCE OF FUNDING NUMBERS		
			PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.
					WORK UNIT ACCESSION NO EIRP 31631
11. TITLE (Include Security Classification) Power Grubbers: Section 8.2.3, US Army Corps of Engineers Wildlife Resources Management Manual					
12. PERSONAL AUTHOR(S) Doerr, Ted B.					
13a. TYPE OF REPORT Final report		13b. TIME COVERED FROM _____ TO _____		14. DATE OF REPORT (Year, Month, Day) July 1986	
15. PAGE COUNT 13					
16. SUPPLEMENTARY NOTATION Available from National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161.					
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB-GROUP	Power grubbers Transplanter buckets Site preparation		
			Equipment Crawler tractors		
			Grubbing Brush control		
19. ABSTRACT (Continue on reverse if necessary and identify by block number)					
<p>An equipment report on power grubbers is provided as Section 8.2.3 of the US Army Corps of Engineers Wildlife Resources Management Manual. The report is designed to assist the Corps District or project biologist with the selection and use of types of equipment and materials available for habitat development and manipulation. Topics covered include description, operation, maintenance, limitations, and availability.</p> <p>Power grubbers are crawler tractors with specially designed blades that uproot trees and shrubs individually by cutting the roots underground and lifting or pushing over the plant. The grubber implement itself is a short, stout blade mounted between two heavy supports attached to a power source. Single-tree transplanter buckets are also used for grubbing. Management objectives for using power grubbers are stated, and benefits to wildlife habitat are discussed. The design and assembly of equipment are described and illustrated, and general specifications are provided. Methods of operation are described,</p> <p style="text-align: right;">(Continued)</p>					
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION <b>Unclassified</b>		
22a. NAME OF RESPONSIBLE INDIVIDUAL			22b. TELEPHONE (Include Area Code)		22c. OFFICE SYMBOL

19. ABSTRACT (Continued).

and maintenance and safety requirements are given. Appropriate cautions and limitations are discussed.

## PREFACE

This work was sponsored by the Office, Chief of Engineers (OCE), US Army, as part of the Environmental Impact Research Program (EIRP), Work Unit 31631, entitled Management of Corps Lands for Wildlife Resource Improvement. The Technical Monitors for the study were Dr. John Bushman and Mr. Earl Eiker, OCE, and Mr. Dave Mathis, Water Resources Support Center.

This report was prepared by Mr. Ted B. Doerr, Range Science Department, Colorado State University, Fort Collins, Colo. Mr. Doerr was employed by the Environmental Laboratory (EL), US Army Engineer Waterways Experiment Station (WES), under an Intergovernmental Personnel Act contract with Colorado State University during the period this report was prepared. Mr. Chester O. Martin, Team Leader, Wildlife Resources Team, Wetlands and Terrestrial Habitat Group (WTHG), EL, was principal investigator for the work unit. Mr. Harold T. Wiedemann, Texas Agricultural Experiment Station, The Texas A&M University System, Vernon, Tex., is acknowledged for providing equipment information, photographs, and manuscript review. Information and photographs were also supplied by personnel from Hawk, Inc., Oswego, Ill.; Holt Machinery Company, San Antonio, Tex.; and Schutts Equipment Company, Birmingham, Mich. Review and comments were provided by Mr. Martin, WES, and Mr. Larry E. Marcy, Texas A&M University.

The report was prepared under the general supervision of Dr. Hanley K. Smith, Chief, WTHG, EL; Dr. Conrad J. Kirby, Chief, Environmental Resources Division, EL; and Dr. John Harrison, Chief, EL. Dr. Roger T. Saucier, WES, was Program Manager, EIRP. The report was edited by Ms. Jessica S. Ruff of the WES Information Products Division (IPD). Drawings were prepared by Mr. John R. Harris, Scientific Illustrations Section, IPD, under the supervision of Mr. Aubrey W. Stephens, Jr.

COL Allen F. Grum, USA, was the previous Director of WES. COL Dwayne G. Lee, CE, is the present Commander and Director. Dr. Robert W. Whalin is Technical Director.

This report should be cited as follows:

Doerr, Ted B. 1986. "Power Grubbers: Section 8.2.3, US Army Corps of Engineers Wildlife Resources Management Manual," Technical Report EL-86-44, US Army Engineer Waterways Experiment Station, Vicksburg, Miss.

#### NOTE TO READER

This report is designated as Section 8.2.3 in Chapter 8 -- EQUIPMENT, Part 8.2 -- SITE AND SEEDBED PREPARATION EQUIPMENT, of the US ARMY CORPS OF ENGINEERS WILDLIFE RESOURCES MANAGEMENT MANUAL. Each section of the manual is published as a separate Technical Report but is designed for use as a unit of the manual. For best retrieval, this report should be filed according to section number within Chapter 8.

## POWER GRUBBERS

### Section 8.2.3, US ARMY CORPS OF ENGINEERS WILDLIFE RESOURCES MANAGEMENT MANUAL

---

DESCRIPTION . . . . .	4	LIMITATIONS . . . . .	7
OPERATION . . . . .	4	AVAILABILITY . . . . .	8
MAINTENANCE . . . . .	7	LITERATURE CITED . . . . .	9

---

Power grubbers are crawler tractors with specially designed blades that uproot trees and shrubs individually by cutting the roots underground and lifting or pushing over the plant. The grubber implement itself is a short, stout blade mounted between 2 heavy supports attached to a power source (Larson 1980). Power grubbers were first developed in 1939 and were attached to large tractors (Dickson et al. 1940); these units, referred to as high-energy grubbers, required tractors with a power rating in excess of 100 hp. Modifications in the 1970's resulted in the development of a low-energy grubber with a "shift-on-the-go" transmission and a hydraulically controlled articulating blade (Wiedemann 1982). Although specific blades have been developed for grubbing, single-tree transplanter buckets can also be used.

Grubbing creates less soil and vegetation disturbance than bulldozing and root plowing and is more economical in sparse to moderately dense brush. The technique effectively creates small clearings in brush-dominated areas when the scale of the operation precludes use of chains or cables. Managers have excellent control of the clearing size, clearing configuration, percent of brush cover removed, number of stems removed, and the specific trees to be removed. Therefore, grubbing can be used to selectively remove undesirable vegetation and increase habitat diversity.

Grubber blades have been used primarily in the Southwest to control multistem brush and tree species such as mesquite (*Prosopis glandulosa*), huisache (*Acacia farnesiana*), blackbrush (*A. rigidula*), and juniper (*Juniperus* spp.); they have also been used on oaks (*Quercus* spp.), cottonwoods (*Populus* spp.), and elms (*Ulmus* spp.) (Bontrager et al. 1979a,b; Meadors et al. 1973;

Wiedemann 1982; Wiedemann and Cross 1980, 1981; Wiedemann et al. 1977, 1979). Single-tree transplanter buckets have been used throughout the United States for removal of woody plants.

#### DESCRIPTION

Grubber blades and single-tree transplanter buckets are designed to be used on rubber-tired tractors, front-end loaders, and crawler tractors. Rubber-tired vehicles are a new modification that use foam-filled tires (Wiedemann 1982). Grubber blades can be mounted directly on standard dozer blades, front-mounted C-frames, or bucket loader frames. The blade is usually 24 to 48 in. wide (H. T. Wiedemann, Texas Agricultural Experiment Station, pers. commun., 1984), extends 12 in. below the level of the dozer blade (if attached directly to the blade), and has hydraulic arms that rotate the blade in a 70-deg arc (Fig. 1). Grubbers with hydraulic blades can remove trees with diameters 33% greater than trees removed by grubbers without hydraulic blades. Single-tree transplanter buckets are 30 to 60 in. wide, 36 in. deep, and come to an extended point in the center (Fig. 2). Bucket lifting capacities range between 1000 and 5000 lb, depending on the bucket size and tractor horsepower (see Table 1 for further specifications).

Table 1. Specifications for power grubbers and single-tree transplanters

Feature	Grubber Blade, Holt Machinery	Transplanter Bucket	
		Hawk, Inc.	Schutts Equipment
Blade/bucket width	24-48 in.	30-48 in.	16, 18, 24, 30, 36, 48, 60 in.
Maximum tree diameter that can be treated	12-48 in.	8-36 in.	
Minimum treatment rate	0.2-0.5 min/ tree	2 min/ tree	2 min/tree
Power requirements	65-180 hp	30-65 hp	20-70 hp

#### OPERATION

Low-energy grubbers require tractors with power ratings of 65 hp (Bontrager et al. 1979a). Single-tree transplanter buckets require a tractor with a power rating of 30 to 45 hp (small buckets) to 45 to 65 hp (large buckets)



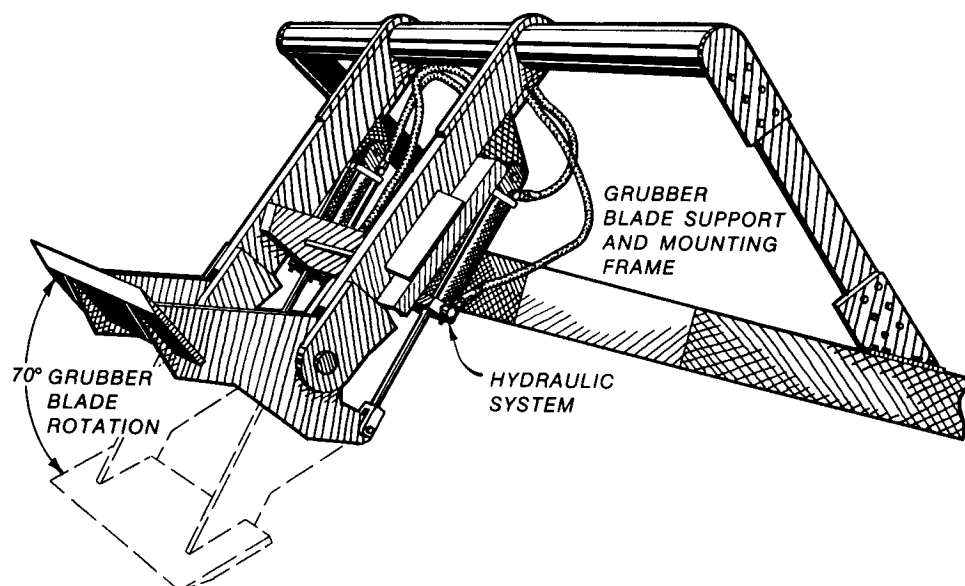


Figure 1. Power grubber attached to tracked vehicle (top), and illustration of hydraulic arms with blade at extended positions (bottom). (Photo courtesy of H. T. Wiedemann, Texas Agricultural Experiment Station)

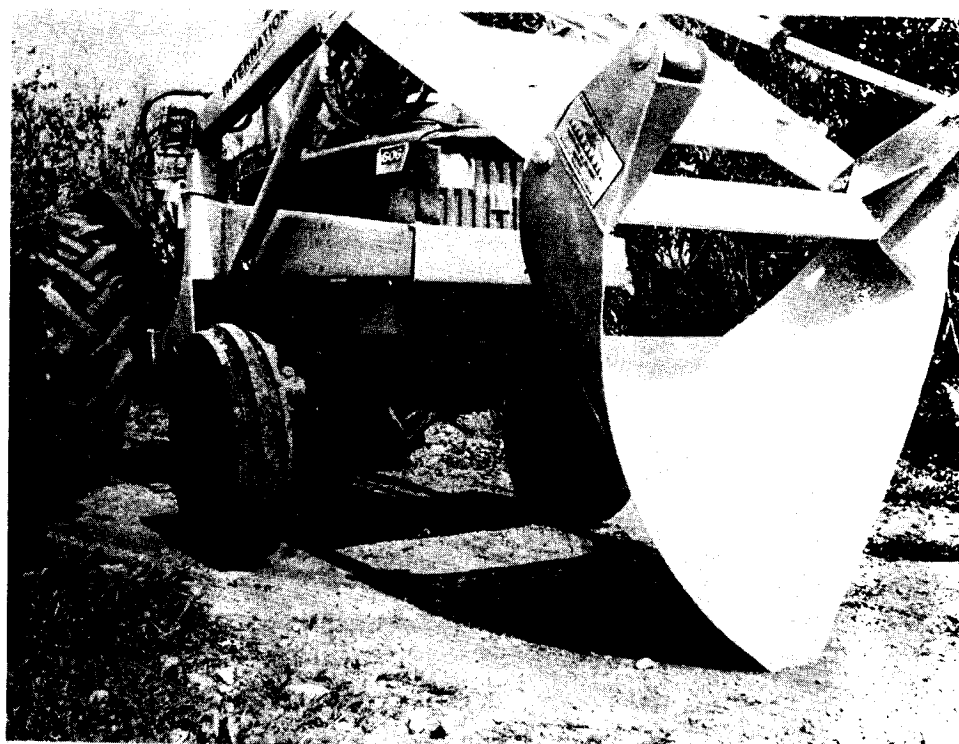
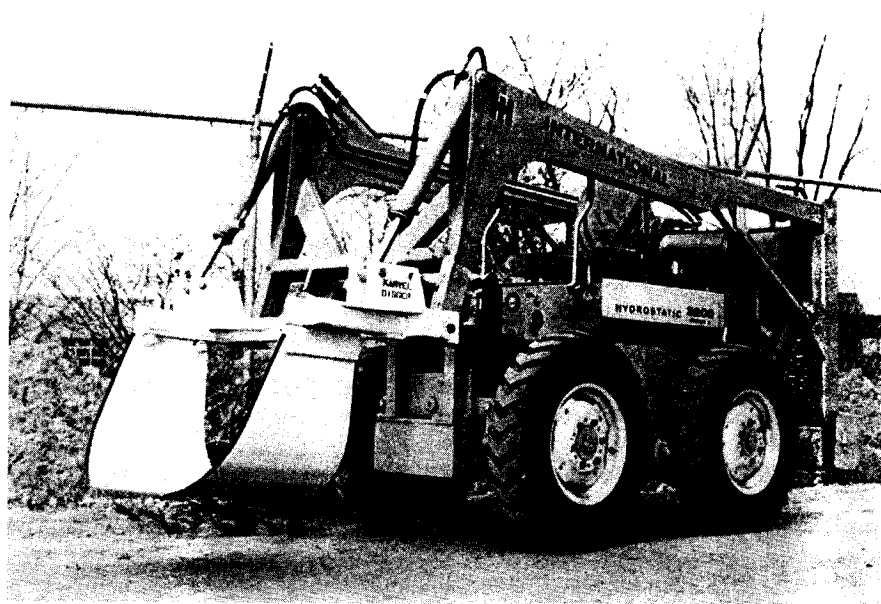


Figure 2. Single-tree transplanter buckets. (Photos courtesy of Hawk, Inc. [top] and Schutts Equipment [bottom])

(Hawk, Inc. 1983). Power sources should be driven only by experienced tractor operators.

Operation speed varies with topography, soil conditions, species to be treated, density of plants, and equipment being used. Treatment rates vary between 1.5 and 15 acres per hour (Wiedemann 1982, Wiedemann and Cross 1981). Grubbers have been used on plants with stem diameters of 4 to 13 in.; however, plants over 22 in. in diameter have been removed (Bontrager et al. 1979a; Wiedemann and Cross 1980; Wiedemann et al. 1977, 1979). Trees 4 to 48 in. in diameter can be uprooted with 100- to 200-hp crawler tractors on a sustained basis (Wiedemann, pers. commun., 1984). Small transplanter buckets can remove trees up to 8 in. in diameter, and large buckets can remove trees up to 36 in. in diameter (Hawk, Inc., pers. commun., 1983). Areas may need to be regrubbed after several growing seasons (Wiedemann and Cross 1981); however, a prescribed burning program may be a more efficient way to maintain these clearings (Bontrager et al. 1979a).

#### MAINTENANCE

Tractors should be maintained following manufacturers' specifications, and grubber blades should be inspected daily for broken or cracked parts and blade sharpness. Blade grinding or replacement will be necessary periodically. Frames, hydraulic assemblies, attachments, and pins and bushings should be inspected monthly. All repairs should be timely.

#### LIMITATIONS

Because individual tree uprooting is time consuming, grubbers are not suited for use on dense stands of vegetation. Grubbing is also not economical for nonsprouting species where effective control can be accomplished without cutting the roots (Larson 1980). Grubbers should not be operated on slopes greater than 18%. Grubbing time is reduced by wet clay soils and rocky sites, and uprooting should be discontinued when sites are too dry for blades to enter the soil effectively (Wiedemann and Cross 1981). Soil and vegetation disturbance is greater when using crawler tractors compared to rubber-tired tractors. Rubber-tired tractors are also more fuel efficient and initial costs are lower, but they are not as durable on rough sites (Wiedemann 1982).

## AVAILABILITY

Grubber blades or single-tree transplanting buckets are available from the following sources:

Hawk, Inc.  
Route 71  
Oswego, Illinois 60543

Schutts Equipment Company  
P. O. Box 412  
Birmingham, Michigan 48092

Holt Machinery Company  
P. O. Box 658  
San Antonio, Texas 78243

Grubbers may also be fabricated by equipment dealers or local machine shops.

Drawings and information are available from:

Texas Agricultural Experiment Station  
Texas A&M University  
Box 1648  
Vernon, Texas 76384

## LITERATURE CITED

- Bontrager, O. E., C. J. Scifres, and D. L. Drawe. 1979a. Low-energy grubbing/prescribed burning systems for control of huisache. Pages 40-41 In D. N. Ueckert and J. E. Huston, eds. Rangeland Resources Research. Tex. Agric. Exp. Sta. Consolidated Prog. Rep. 3665. 112 pp.
- \_\_\_\_\_, \_\_\_\_\_, and \_\_\_\_\_. 1979b. Huisache control by power grubbing. J. Range Manage. 32:185-188.
- Dickson, R. E., B. G. Langley, and C. E. Fisher. 1940. Water and soil conservation experiment at Spur, Texas. Tex. Agric. Exp. Sta. Bull. B-587. 35 pp.
- Hawk, Inc. 1983. Transplanter fact sheet. Oswego, Ill. 2 pp.
- Larson, J. E. 1980. Revegetation equipment catalogue. USDA For. Serv. Equipment Development Center, Catalogue No. 8042 2501. 198 pp.
- Meadors, C. H., C. E. Fisher, R. H. Haas, and G. O. Hoffman. 1973. Combinations of methods and maintenance control of mesquite. Pages 53-59 In Mesquite--Growth and development, management, economics, control, uses. Tex. Agric. Exp. Sta. Resour. Manage. 1. 84 pp.
- Wiedemann, H. T. 1982. New developments in mechanical brush control. Tex. Agric. Exp. Sta., Proc. Int. Ranchers Round-up. pp 181-189.
- \_\_\_\_\_, and B. T. Cross. 1980. Performance of low-energy grubber for control of selected brush species. Pages 96-98 In D. N. Ueckert and J. E. Huston, eds. Rangeland Resources Research. Tex. Agric. Exp. Sta. Consolidated Prog. Rep. 3665. 112 pp.
- \_\_\_\_\_, and \_\_\_\_\_. 1981. Low-energy grubbing for control of junipers. J. Range Manage. 34:235-237.
- \_\_\_\_\_, \_\_\_\_\_, and C. E. Fisher. 1977. Low-energy grubbers for controlling brush. Trans. Am. Soc. Agric. Eng. 20:210-213.
- \_\_\_\_\_, J. E. Slosser, and B. T. Cross. 1979. Tree uprooting with a low-energy grubber for shelter belt thinning. Trans. Am. Soc. Agric. Eng. 22:1275-1278.